

4

3


2

1

# TONKAFLO® Pumps SERIES AS40400

FLOW RANGE-210 TO 520 HEAD RANGE 34 TO 454 PSI  
 STAINLESS STEEL STAGED PUMP PERFORMANCE CURVES - 3550 RPM

CUSTOMER \_\_\_\_\_ 60 Hz  
 MODEL \_\_\_\_\_

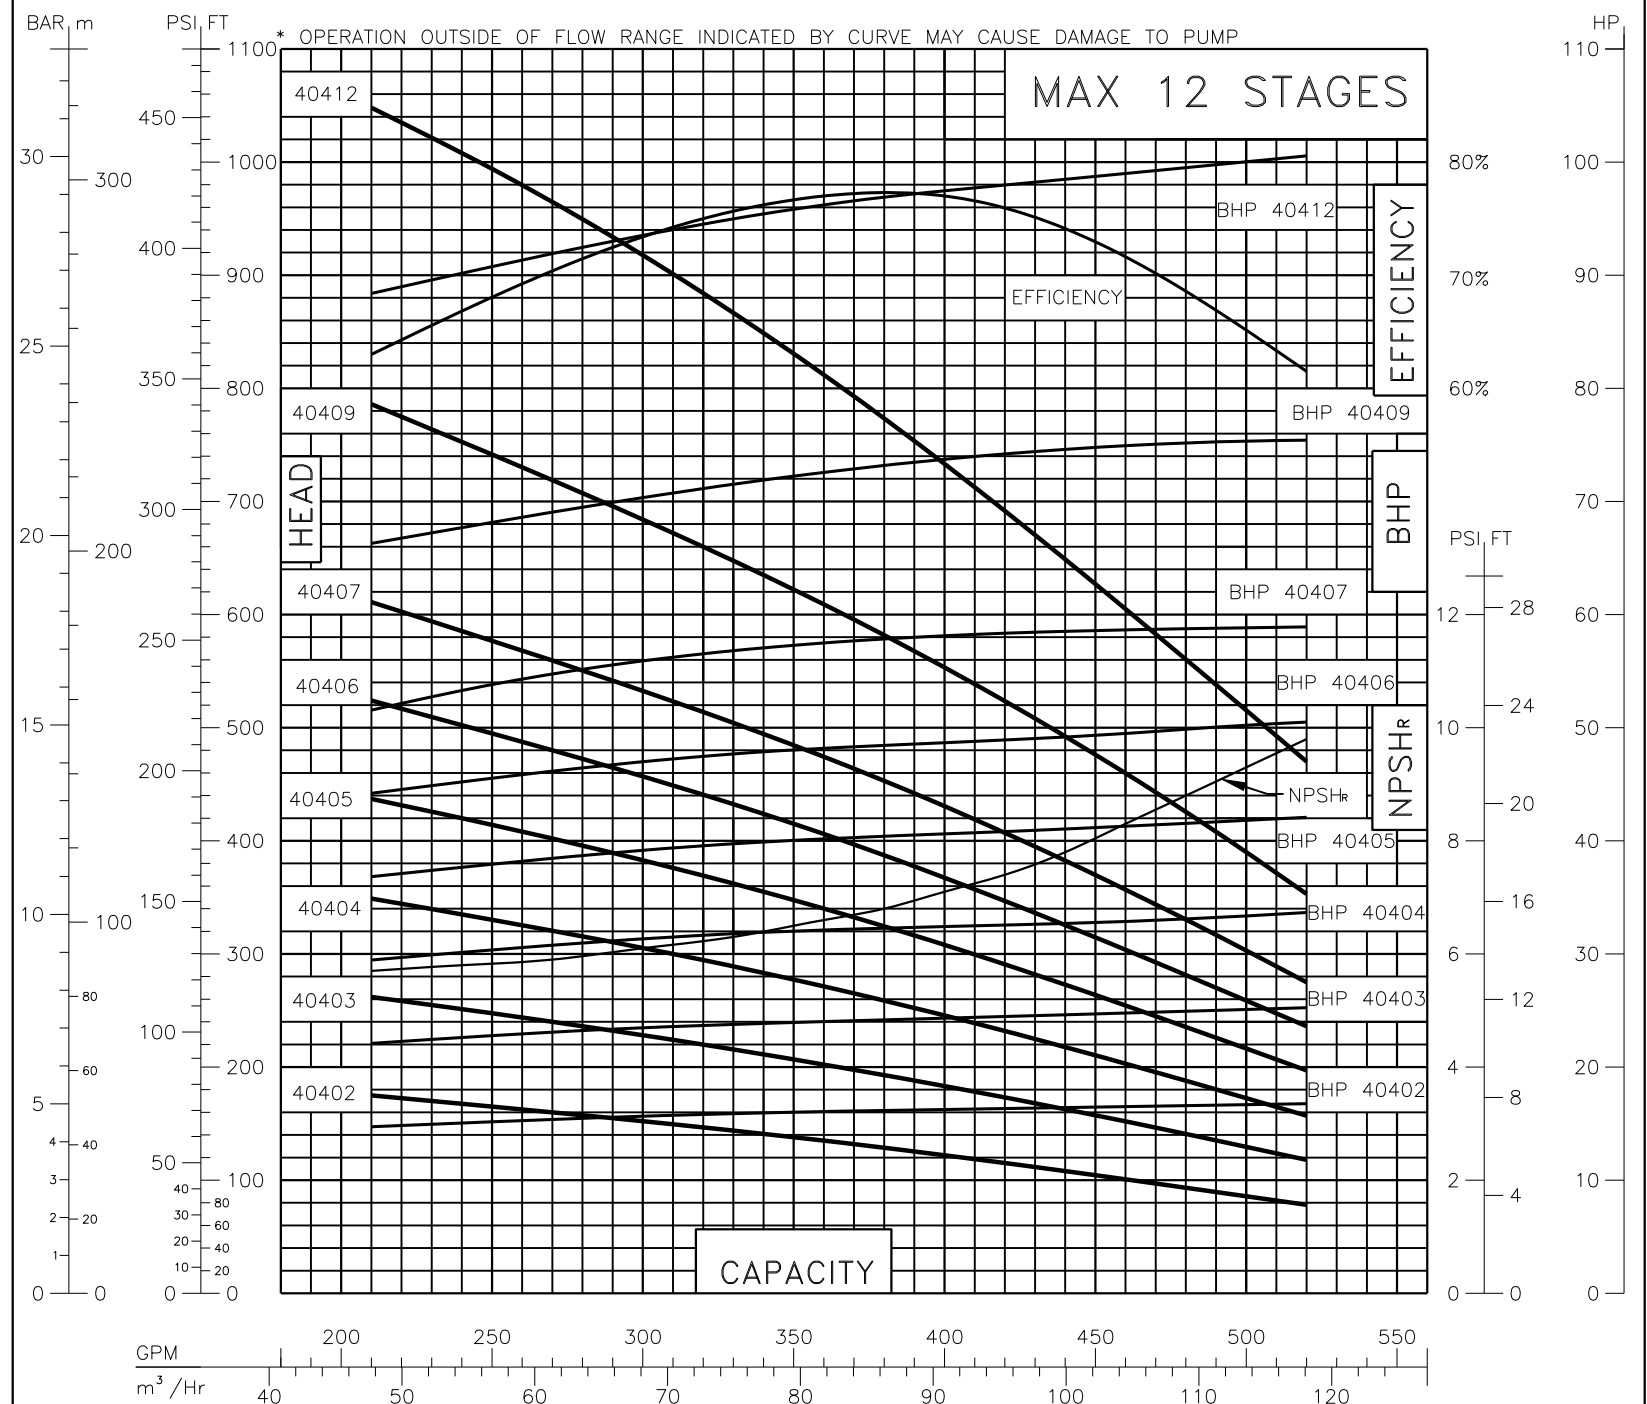


NOTES:  
 1. BHP CURVES INDICATE HP REQUIREMENT AT THE PUMP SHAFT WHICH INCLUDES BEARING FRAME.  
 MOTOR HP = BHP/MOTOR EFFICIENCY.  
 2. FOR SIZES OTHER THAN THE STANDARD PUBLISHED, PLEASE CONSULT FACTORY.  
 3. OPERATING ABOVE OR BELOW THE SPECIFIED RANGE COULD DAMAGE THE PUMP.

P/N 1225760 Rev E

**suez** Water Technologies & Solutions  
 5951 Clearwater Drive Minnetonka, MN 55343-8995 USA • Phone 1-866-439-2837 • Fax 952-988-6060  
 • <http://www.suezwatertechnologies.com>

E	SUEZ REBRANDING	131562	TG	SR	MS	19 Oct 18	TOLERANCES UNLESS NOTED DECIMALS ANGLES FRAC
E1	SUEZ REBRANDING	131562	TG				
D	CURVE REDRAW	15096	AK	BRB	MG	01 Aug 12	
C	REVISED BAR SCALE	9459	PFM	MJT	-	30 Dec 04	
B	REVISED FOR PUMP TOOL	5724	PFM	-	-	24 Apr 01	
REV	DESCRIPTION	ECO	DWN	APPR	APPR	DATE	



CUSTOMER INFORMATION

DWG,TF,PRFM CURVES,AS40000  
 4" & 6" INL, 60 HZ

DRAWING NUMBER				REVISION
1202834				E
PROJECT NO.	PART/MATERIAL NO.	SCALE	SIZE	SHEET
	1225760	1:1	C	1 OF 1

4

3

2

1