

4

3


2

1

TONKAFLO® Pumps SERIES AS22500

FLOW RANGE - 100 TO 300 GPM HEAD RANGE - 38 TO 389 PSI
 STAINLESS STEEL STAGED PUMP PERFORMANCE CURVES - 3565 RPM

CUSTOMER _____ 60 Hz


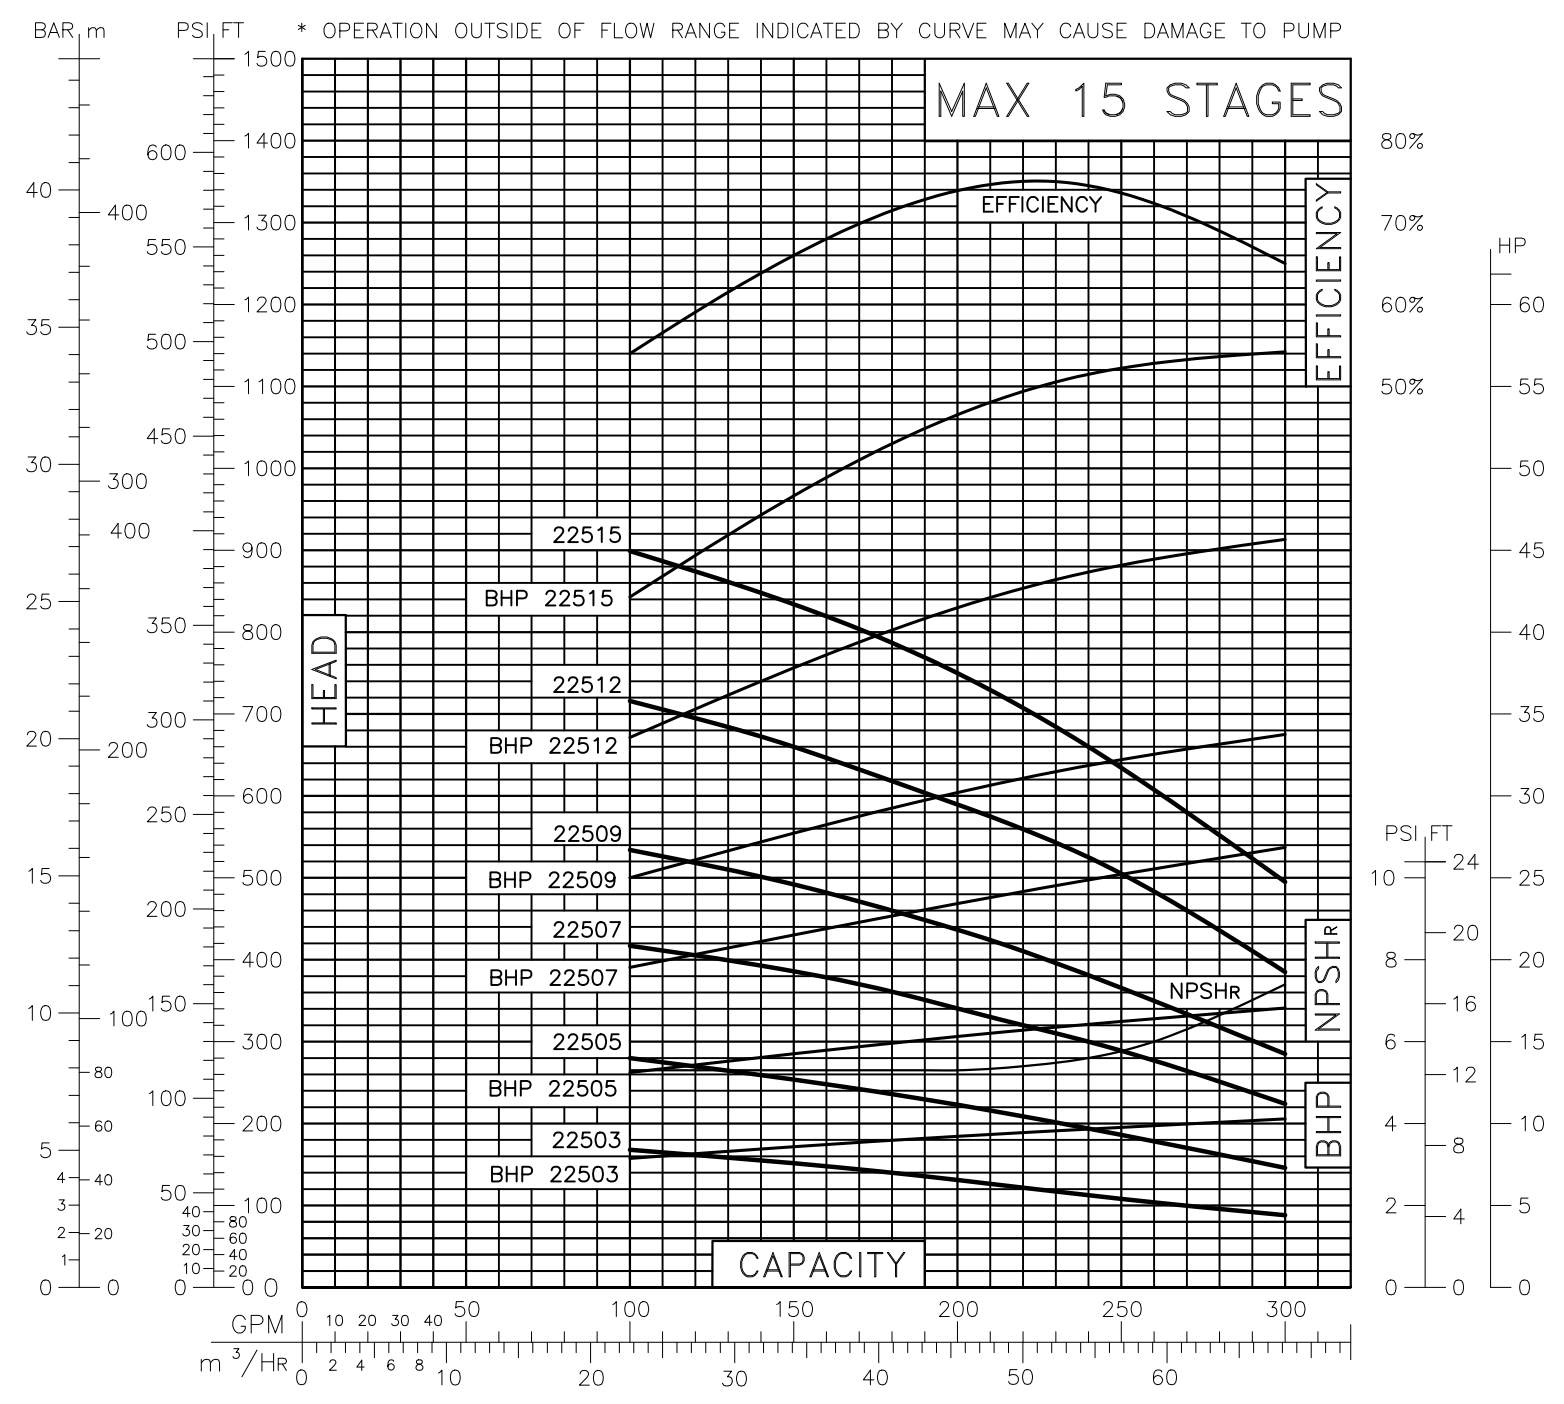


- NOTES:
1. BHP CURVES INDICATE HP REQUIREMENT AT THE PUMP SHAFT WHICH INCLUDES BEARING FRAME. MOTOR HP = BHP/MOTOR EFFICIENCY.
 2. DO NOT APPLY SERVICE FACTOR FOR SIZING THE MOTOR. FOR EXAMPLE, IF MOTOR HP CALCULATES TO 31.5 THE MOTOR SELECTION SHOULD BE 40 HP.
 3. FOR SIZES OTHER THAN THE STANDARD PUBLISHED, PLEASE CONSULT FACTORY.
 4. OPERATING ABOVE OR BELOW THE SPECIFIED RANGE COULD DAMAGE THE PUMP.

P/N 3061021 Rev B

VEOLIA 5951 Clearwater Drive Minnetonka, MN 55343-8995 USA • Phone 1-866-439-2837 • Fax 952-988-6060
<http://www.watertechnologies.com>

B	SUEZ REBRANDING	131562	TG	SR	MS	19 Oct 18			
A	INITIAL RELEASE	14785	-	-	-	-			
REV	DESCRIPTION	ECO	DWN	APPR	APPR	DATE			

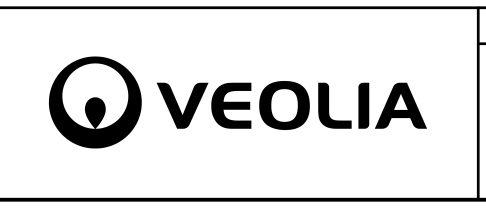

CUSTOMER INFORMATION
TONKAFLO

DWG, TF, PRFM CURVES, 22500,
 4 INL, 60HZ

DRAWING NUMBER 1310413				REVISION B
REF.:	DOC. OWNER:	SCALE	SIZE	SHEET
PROJECT NO.	PART/MATERIAL NO.	1:1	C	1 OF 1
3061021	3061021			

4

3

2

1

FILE LOCATION: C:\Users\j212724488\AppData\Local\Temp\AcP\Pub\B...21100\1310413.dwg