

4

3


2

1

# TONKAFLO® Pumps SERIES AS9000

FLOW RANGE-30 TO 120 GPM HEAD RANGE - 32 TO 638 PSI  
STAINLESS STEEL STAGED PUMP PERFORMANCE CURVES - 3500 RPM

CUSTOMER \_\_\_\_\_ 60 Hz  
MODEL \_\_\_\_\_

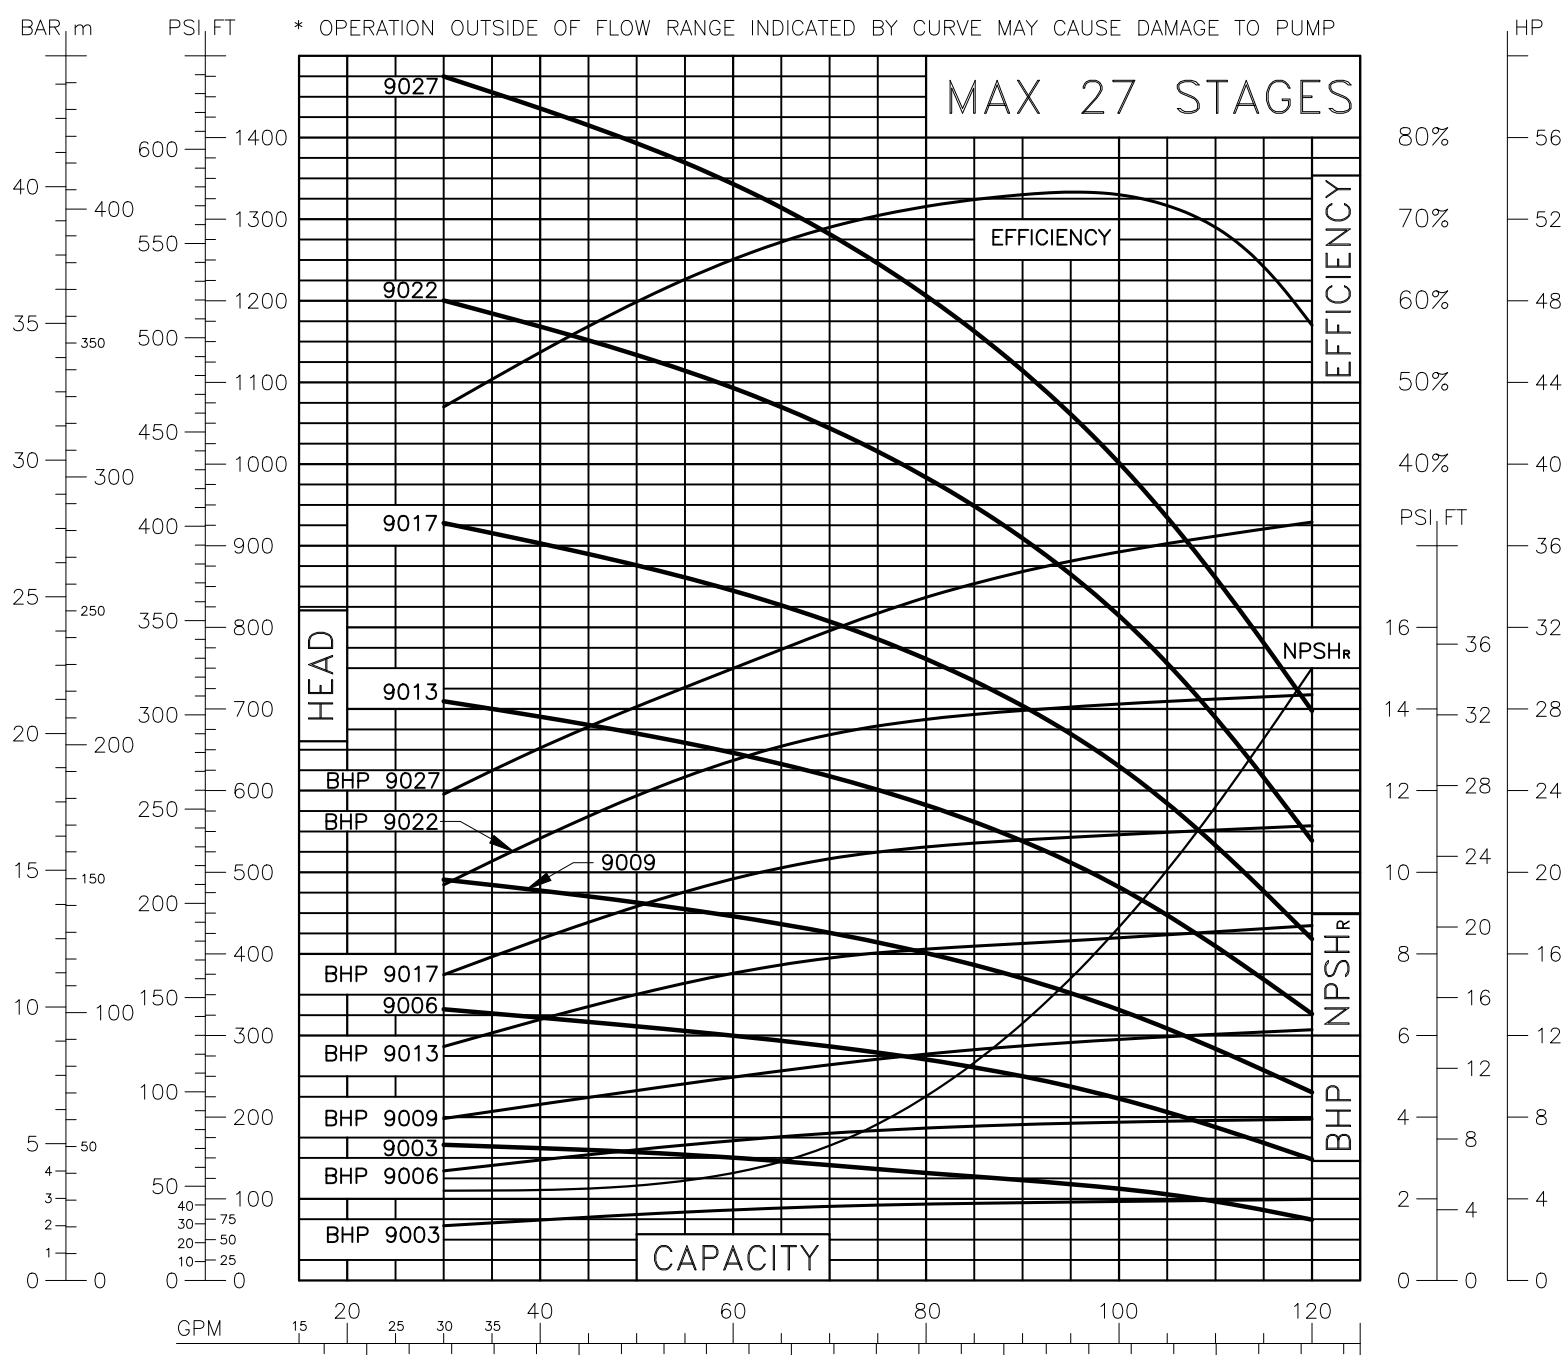


- NOTES:
1. BHP CURVES INDICATE HP REQUIREMENT AT THE PUMP SHAFT WHICH INCLUDES BEARING FRAME. MOTOR HP = BHP/MOTOR EFFICIENCY.
  2. DO NOT APPLY SERVICE FACTOR FOR SIZING THE MOTOR. FOR EXAMPLE, IF MOTOR HP CALCULATES TO 31.5 THE MOTOR SELECTION SHOULD BE 40 HP.
  3. FOR SIZES OTHER THAN THE STANDARD PUBLISHED, PLEASE CONSULT FACTORY.
  4. OPERATING ABOVE OR BELOW THE SPECIFIED RANGE COULD DAMAGE THE PUMP.

**suez** Water Technologies & Solutions  
 5951 Clearwater Drive Minnetonka, MN 55343-8995 USA • Phone 1-866-439-2837 • Fax 952-988-6060  
 • <http://www.suezwatertechnologies.com>

P/N 3063475 Rev B

B	SUEZ REBRANDING	131562	TG	SR	MS	19 Oct 18			
A	INITIAL RELEASE	14825	-	-	-	-			
REV	DESCRIPTION	ECO	DWN	APPR	APPR	DATE			



CUSTOMER INFORMATION  
**TONKAFLO**

DWG,TF,PRFM CURVES,9000,  
 4 INL,60HZ

DRAWING NUMBER <b>1310483</b>				REVISION <b>B</b>
PROJECT NO.	PART/MATERIAL NO. 3063475	SCALE N.T.S	SIZE C	SHEET 1 OF 1

4

3

2

1

FILE LOCATION: C:\Users\j212724488\AppData\Local\Temp\AcP\Pub\B1\_21100\_1310483.dwg