

TONKAFLO® Pumps

SERIES AS62500

FLOW RANGE-300 TO 720 GPM HEAD RANGE - 175 TO 804 FEET

STAINLESS STEEL STAGED PUMP PERFORMANCE CURVES - 3550 RPM


STANDARD PUMP MODELS

60 Hz

SHUT-OFF HEAD IN FEET:

62503 = 442 62505 = 695

62504 = 568 62506 = 804

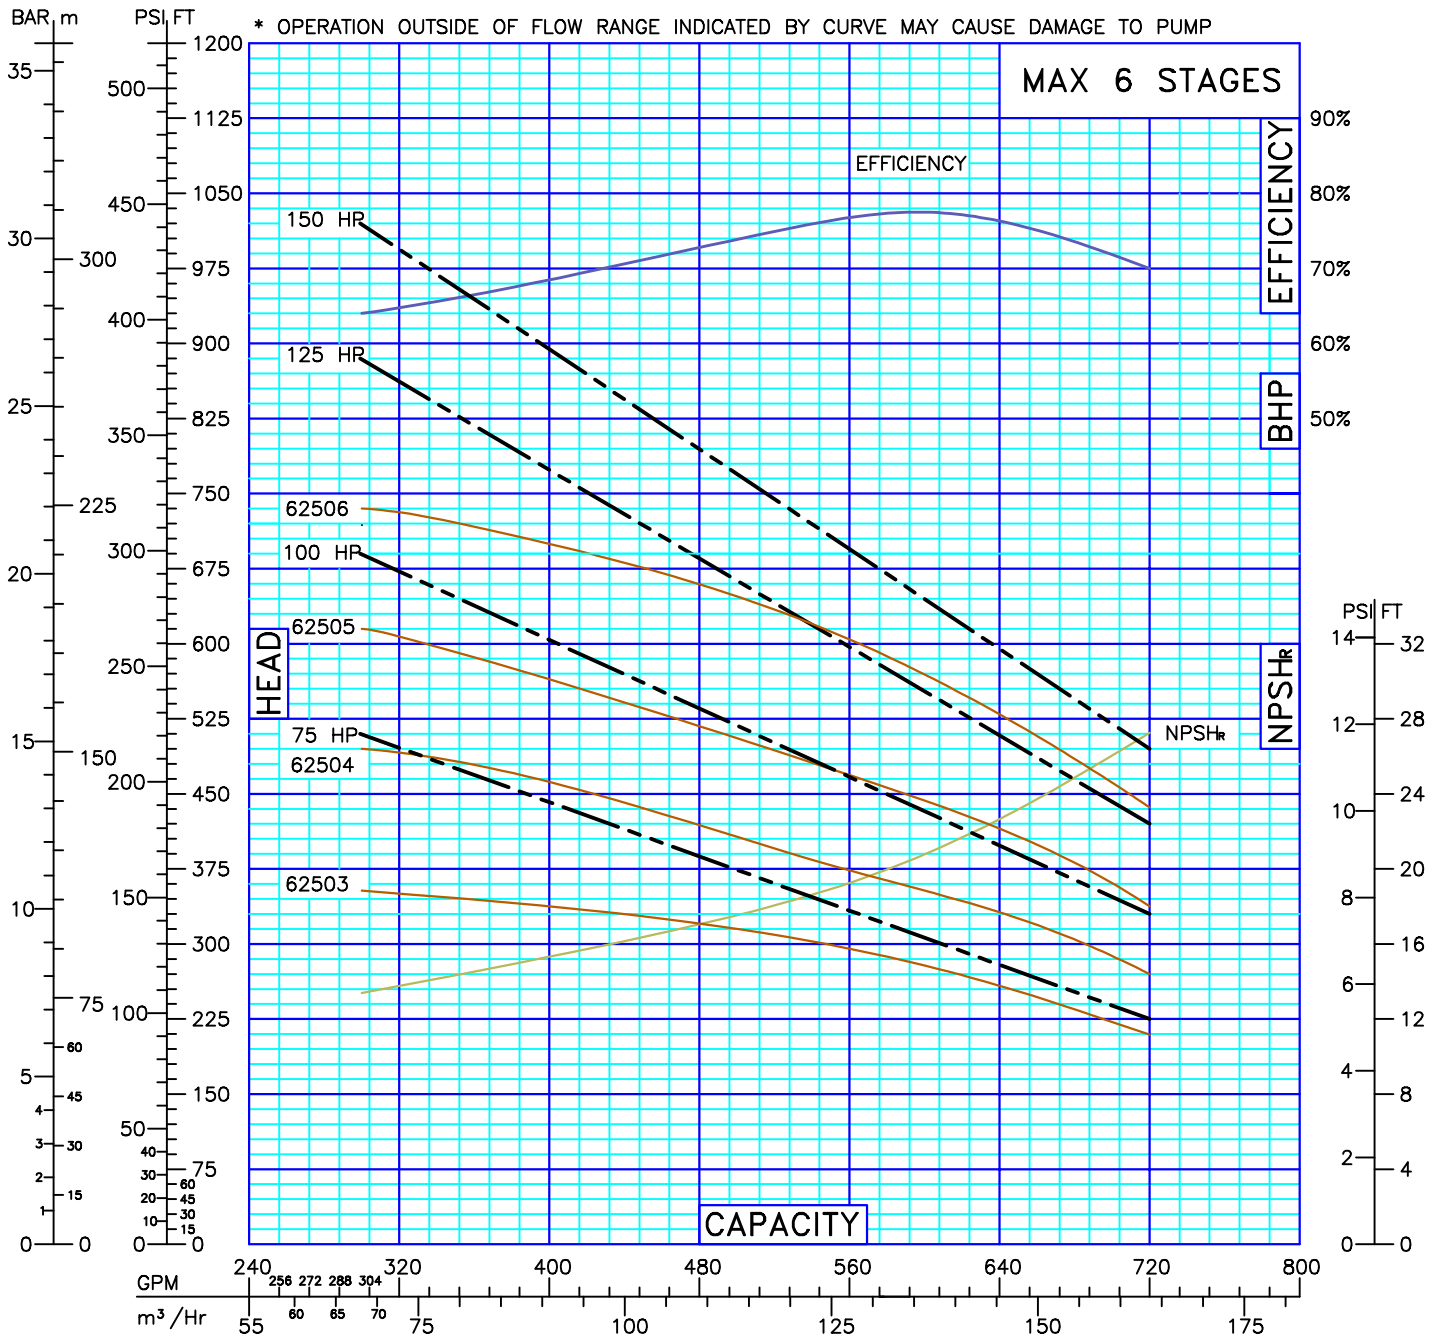

NOTES:

- 1.BHP CURVES INDICATE HP REQUIREMENT AT THE PUMP SHAFT. MOTOR HP = BHP/MOTOR EFFICIENCY.
- 2.FOR SIZES OTHER THAN THE STANDARD PUBLISHED, PLEASE CONSULT FACTORY.
- 3.OPERATING ABOVE OR BELOW THE SPECIFIED RANGE COULD DAMAGE THE PUMP.

